

DocuCentre-V
C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275



DocuCentre-V

C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

Digital Colour Multifunction Device

A new standard in flexibility and efficiency to allow
you to work smarter

Transform the way you work

To ensure success, organisations must provide a work environment where individuals can work efficiently and flexibly.

For your organisation to perform at its full potential, you should use the best technology and business tools to work smarter and focus on what really matters.

The new DocuCentre-V C7775/C6675/C5575/C4475/C3375/C3373/C2275 solutions are designed to help you work smarter through business drivers such as innovation, cost efficiency, productivity and sustainability.



DocuCentre-V

C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

The photo is of the DocuCentre-V C7775 CPS model

Bringing you ground breaking technology to help you work smarter

Industry First, Facial Recognition Technology

With Smart WelcomEyes Advance*, the recovery from sleep mode won't keep you waiting – it's ready when you are. It can also recognise the face of each user and use that information as a simple, rapid authentication process.

* Optional



Smart WelcomEyes Advance

The DocuCentre-V series automatically recovers from Sleep mode as users approach the device. With Smart WelcomEyes Advance, a real-time proximity camera and a pyroelectric heat sensor, detect when a user is approaching and recovers from Sleep mode so it is ready to use in just 3.1 seconds*.

This intuitive technology simplifies operational processes and saves both time and energy. What's more, a face recognition camera uses profiles to customise the touch screen interface to suit their particular applications**.

* With DocuCentre-V C3375/C3373/C2275

**Detailed specifications are set out in the Customer Expectation Document, which is available from your Fuji Xerox Account Manager.



1 This groundbreaking technology uses an infrared pyroelectric sensor to monitor thermal changes in the vicinity of the device and so detects a person approaching.



2 The user detection camera verifies human motion, such as the direction their toes are pointing, to determine whether the person wants to use the device.




3 It also offers a sophisticated, yet simple, user authentication method through face recognition. The face recognition camera can recognise the face of the user standing in front of the device, making authentication simple and fast.

* The local authentication mode must be enabled.

Simpler Operations


Navigating and operating screens can be simplified by installing a free optional software application – EasyUI Solution. This offers individual users a simple and easy-to-use operation screen, reducing working time.



Users can preview the finished results of their copying projects – for example, Nup, two-sided, stapled – when setting the copy functions.



Assign single touch buttons with commonly-used workflows for simple and quick operation.



Scanning is now much simpler with the automatic recognition of both the orientation and number of printed sides of the original document. The scan data destination is also set automatically during the authentication process. Or, if you prefer, you can select the destination quickly from your send history.

Image Recognition through a Reputable Processor

The technology of human/face recognition camera uses Image Recognition through a reputable processor for vehicle-mounted cameras. Rapid recognition of users enables the device to minimise power consumption, and ensure that it is ready for use immediately.

Improving your business performance and uptime

Mobility in the Workplace

Mobile professionals can stay connected to the communications tools and productivity solutions offered by the DocuCentre-V C7775 series – for more flexibility regardless of location.



Simple and Easy to Use

New 9-inch, colour touch screen features simple icons driven by flick, drag and tap operation promoting similar and consistent operability when using a smart phone/tablet device.

Single touch icons can be created for frequently-used functions. Assign the single touch icon its own scanning workflow for fast document distribution and archiving.



Extend your office productivity possibilities

Experience high output performance with print speeds of up to 70 pages per minute (ppm), with a fast recovery from sleep mode of 3.1 seconds*.

* For DocuCentre-V C3375/C3373/C2275.

Scan and copy more, faster

Single-pass, duplex scanner* scans at speeds of up to 160 images per minute for exceptional productivity. The lightweight, duplex automatic document feeder can also hold up to 130 sheets.

*Optional single-pass scanner is required for DocuCentre-V C3375/C3373/C2275.

Support for banner printing

You can now print posters in your office with the DocuCentre-V series. They are capable of handling paper sizes up to 1,200mm x 320mm, offering up many new print and copy possibilities.

Onboard Scanning Solutions

Dramatically increase your workflow efficiency with these onboard scanning solutions: on-box Optical Character Recognition with searchable PDF creation; secure PDF; scan to USB device; Scan to Email, Folder, and Network*. Plus, single pass scanning simultaneously scans both sides of two-sided documents, while high compression technology reduces file sizes.

*Optional accessories may be required.

Conversion to Editable Word® and Excel® Files

Scanned documents can be converted to Microsoft Word® and Excel® format so you can edit them easily*. Paper documents and original data that have been lost can be regained and easily used, saving time and hassle for users by eliminating rekeying chores.

* Optional. The Advanced Scan Kit is required.

Powerful media handling

Supporting a wide range of media weights from 52gsm up to 300gsm giving you access to more applications that meet your internal requirements.

Mobile access anywhere, anytime

Apple® AirPrint™ allows printing email, photos and important office documents directly from Apple iPhone®, iPad® or Mac devices with no drivers to install.

Building your business for a secure and sustainable future

"Real Green" Solutions

Fuji Xerox is committed to real, measurable green solutions in office environments.

These can be achieved while at the same time improving user convenience and efficiency during operations.



Smart Energy Management Technology.

Our innovative Smart Energy Management Technology reduces energy usage by only activating the functions required by the user. What's more, you will enjoy a much quieter office environment.

Two second start up time – no need to wait!

When the DocuCentre-V series recovers from sleep mode, it takes only two seconds to start working. Even if the device is routinely set to sleep mode to reduce power use, users don't experience any delays in set-up and operation.

High-precision LED print head technology for reduced power use

Digitally Enhanced Lighting Control Imaging System (DELICIS) achieves an output print resolution of 1,200 x 2,400 dpi that is equivalent or even superior to that produced by a conventional laser raster output scanner (ROS) system. LED print head technology makes it possible to build smaller devices and improve energy efficiency.


A Quiet Environment for Greater Efficiency

To continue to address the levels of noise in the office environment, we have introduced advanced technologies to our "Quiet Flagship Model" such as the Duplex Automatic Document Feeder*, incorporating new image processing.

* 63% improvement in quietness compared to conventional models.

Example Quietness Model

DocuCentre-V C4475 + C3 Finisher

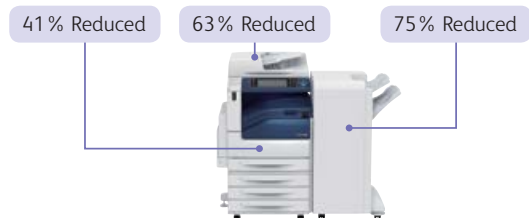

Operation sounds have been cut by a maximum of 61% compared to predecessor models.

Improved energy efficiency in induction heating fuser technology


Induction heating fusing technology eliminates the need for pre-heating the fusing unit and minimises power use when the machine is in standby mode.

TEC value




| | |
|--------------------|----------|
| DocuCentre-V C2275 | 0.99 kWh |
| DocuCentre-V C3373 | 1.25 kWh |
| DocuCentre-V C3375 | 1.42 kWh |
| DocuCentre-V C4475 | 2.11 kWh |
| DocuCentre-V C5575 | 2.66 kWh |
| DocuCentre-V C6675 | 3.52 kWh |
| DocuCentre-V C7775 | 3.73 kWh |

Extra functionality in finishing




Stapling

Stapling multiple page documents, such as meeting materials into sets, is available.




Punch

A hole punch process can be used for filing documents in binders.




Saddle stitching

This bi-fold and stapling process is ideal for creating catalogues and booklets.







Z Fold

Z Fold is useful to include A3 documents in A4 size.



Tri-fold

The C-fold is useful when creating materials for envelopes.

| | Finisher A1 | Finisher B1 + Booklet Maker Unit for Finisher-B1 | C3 Finisher with Booklet Maker | C3 Finisher with Booklet Maker + Folder Unit CD1 |
|-----------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| |  |  |  |  |
| Stapling thickness | 50 sheets | 50 sheets | 50 or 65 sheets* ⁴ | 50 or 65 sheets* ⁴ |
| Punch | — | 2/4 hole punch* ¹ or 2/3 hole punch* ² | 2/4 hole punch* ⁵ or 2/3 hole punch* ⁶ | 2/4 hole punch* ⁵ or 2/3 hole punch* ⁶ |
| Saddle stitching | — | ○* ³ | ○ | ○ |
| Bi-fold | — | ○* ³ | ○ | ○ |
| Tri-fold | — | — | — | ○* ⁸ |
| Z Fold | — | — | — | ○* ⁸ |
| Tray capacity* ⁷ | Output tray | — | 500 sheets | 500 sheets |
| | Finisher tray | 500 sheets | 2,000 sheets | 1,500 sheets |

*1: 2/4 Hole Punch Kit for Finisher-B1 is required.

*2: US 2/3 Hole Punch Kit for Finisher-B1 is required.

*3: Booklet Maker Unit for Finisher-B1 is required. For the features of saddle stitching or bi-folding, Finisher B1 does not perform folding but perform scoring.

*4: C3 Finisher Staple Unit 65 Sheets is required.

*5: Punch Unit 2H/4H is required.

*6: Punch Unit US 2H/3H is required.

*7: 64gsm paper

*8: Folder Unit CD1 is required.

Output Tray Designation

When Inner Output Tray **1** or Side Tray **2** is attached, you can designate the machine's output trays to be used for specific functions, i.e. copy, print, or fax.



High-Capacity Feeders

Choose the Tandem Tray **3**, which can accommodate up to 3,090 sheets.

In addition, an optional High Capacity Feeder which can hold up to 2,030 sheets* of A4-size media (one tray) **4** is available. It supports large-volume output demands.



* 80gsm paper.

Specifications of DocuCentre-V C7775 / C6675 / C5575 / C4475 / C3375 / C3373 / C2275

Basic Specifications/Copy Function

| Item | DocuCentre-V C7775 | DocuCentre-V C6675 | DocuCentre-V C5575 | DocuCentre-V C4475 | DocuCentre-V C3375 | DocuCentre-V C3373 | DocuCentre-V C2275 |
|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|---------------------------|---------------------------------------------------------------|--------------------|--------------------|
| Memory Capacity | 4 GB | | | | | | |
| Hard Disk Capacity | 160 GB or larger (Usable space: 128 GB) | | | | | | |
| Scanning Resolution | 600 x 600 dpi | | | | | | |
| Printing Resolution | 1,200 x 2,400 dpi (High Resolution Photo), 600 x 600 dpi (Text/Text-Photo/Photo/Map) | | | | | | |
| Warm-up Time | 30 seconds or less (20 degrees Celsius room temperature). 24 seconds or less if the main power is on (20 degrees Celsius room temperature) | | | | | | |
| Original Paper Size | Maximum of 297 x 432 mm (A3, 11 x 17") for both Sheet and Book | | | | | | |
| Paper Size | Max | SRA3 (320 x 450 mm), 12.6 x 17.7" (320 x 449.6 mm), 12 x 18" (304.8 x 457.2 mm), A3 [12 x 19" (304.8 x 482.6 mm) when using Bypass Tray] | | | | | |
| | Min | A5 [Postcard and Quadrate NO.3 Envelope (120 x 235 mm) when using Bypass Tray] | | | | | |
| | Image loss width | Lead edge 4 mm or less, trail edge 2 mm or less, and right&left 2 mm or less | | | | | |
| Paper Weight*1 | Paper Tray | 52 - 300 gsm | | | | | |
| | Bypass Tray | 52 - 300 gsm | | | | | |
| First Copy Output Time*2 | B/W: | 3.3 sec. | 3.3 sec. | 3.7 sec. | 4.4 sec. | 4.9 sec. | 6.6 sec. |
| | Colour: | 4.1 sec. | 4.1 sec. | 5.2 sec. | 5.7 sec. | 6.4 sec. | 8.7 sec. |
| | B/W: | 70 ppm | 65 ppm | 55 ppm | 45 ppm | 35 ppm | 25 ppm |
| | Colour: | 70 ppm | 65 ppm | 50 ppm | 45 ppm | 35 ppm | 25 ppm |
| | B/W: | 35 ppm | 32 ppm | 27 ppm | 22 ppm | 20 ppm | 17 ppm |
| | Colour: | 35 ppm | 32 ppm | 25 ppm | 22 ppm | 20 ppm | 17 ppm |
| | B/W: | 14 ppm | 14 ppm | 14 ppm | 14 ppm | 14 ppm | 14 ppm |
| | Colour: | 14 ppm | 14 ppm | 14 ppm | 14 ppm | 14 ppm | 14 ppm |
| Continuous Copy Speed*3 | A4 | B/W: 70 ppm Colour: 70 ppm | | | | | |
| | A3 | B/W: 35 ppm Colour: 35 ppm | | | | | |
| Paper Tray Capacity*4 | Standard | [C7775/C6675/C5575/C4475/C3375/C3373/C2275] 500 sheets x 2 Tray + 867 sheets + 1,133 sheets + Bypass Tray 90 sheets [C5575/C4475/C3375/C3373/C2275] 4 Tray Model: 500 sheets x 4 Tray + Bypass Tray 90 sheets | | | | | |
| | Optional | HCF B1: 2,030 sheets | | | | | |
| | Maximum Paper Capacity | [C7775/C6675/C5575/C4475/C3375/C3373/C2275] 5,120 sheets (Tandem Tray Model + High Capacity Feeder B1) [C5575/C4475/C3375/C3373/C2275] 4,120 sheets (4 Tray Model + High Capacity Feeder B1) | | | | | |
| Output Tray Capacity*4*5 | 250 sheets (A4 LEF), 125 sheets (A3) | | | | | | |
| Power Source | AC 220 - 240 V, 8 A, 50/60 Hz | | | | | | |
| Power Consumption | 2.4kW or less | 2.4kW or less | | 2.4kW or less | | | |
| | Sleep mode: 1.3W or less | Sleep mode: 1.3W or less | | Sleep mode: 1.3W or less | | | |
| | Standby mode: 119W or less | Standby mode: 105W or less | | Standby mode: 56W or less | | | |
| Dimensions | [C7775/C6675/C5575/C4475/C3375/C3373/C2275] W 640 x D 699 x H 1,143 mm (when Duplex Automatic Document Feeder B1-PC is installed) | | | | | | |
| | [C3375/C3373/C2275] W 640 x D 699 x H 1,128 mm (when Duplex Automatic Document Feeder B1-C is installed) | | | | | | |
| | [C7775/C6675/C5575/C4475/C3375/C3373/C2275] W 640 x D 699 x H 1,143 mm (when Duplex Automatic Document Feeder B1-PC is installed) | | | | | | |
| Weight*6 | 148 kg (With Fax and Duplex Automatic Document Feeder B1-PC) | | 135 kg*7 (With Fax and Duplex Automatic Document Feeder B1-PC) | | 130 kg*7 (With Fax and Duplex Automatic Document Feeder B1-C) | | |

*1: Fuji Xerox advises that operators use its recommended paper. Performance may vary for supported speciality and heavy weight media. Documents may not be printed correctly depending on usage conditions. *2: B/W: A4 LEF/Monochrome priority mode. Colour: A4 LEF/Colour priority mode *3: The speed may be reduced due to the image quality adjustment. *4: 80gsm Paper. *5: When the Inner Output Tray is installed, the center tray capacity is 250 sheets (A4 LEF) and the Inner Output Tray capacity is 250 sheets (A4 LEF). *6: Excluding Toner Cartridge. *7: With the 3 Tray Module.

Print Function

| Item | Output Resolution | Description |
|------------------------------|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Printing Resolution | 1,200 x 2,400 dpi | |
| PDL | Standard | PCL5/PCL6 |
| | Optional | Adobe® PostScript® 3™ |
| Supported Operating System*1 | Standard | [PCL6] Windows® XP, Windows Server® 2003 (32-bit) Windows Vista® (32-bit), Windows Server® 2008 (32-bit) Windows® 7 (32-bit), Windows® 8 (32-bit) Windows® XP Professional (64-bit), Windows Server® 2003 (64-bit) Windows Vista® (64-bit), Windows Server® 2008 (64-bit) Windows® 7 (64-bit), Windows Server® 2008 R2 (64-bit) Windows® 8 (64-bit), Windows Server® 2012 (64-bit) [Mac OS X Driver] Mac OS X 10.5/10.6/10.7/10.8 |
| | Optional | [Adobe® PostScript® 3™ Driver] Windows® XP, Windows Server® 2003 (32-bit) Windows Vista® (32-bit), Windows Server® 2008 (32-bit) Windows® 7 (32-bit), Windows® 8 (32-bit) Windows® XP Professional (64-bit), Windows Server® 2003 (64-bit) Windows Vista® (64-bit), Windows Server® 2008 (64-bit) Windows® 7 (64-bit), Windows Server® 2008 R2 (64-bit) Windows® 8 (64-bit), Windows Server® 2012 (64-bit) Mac OS X 10.4.11/10.5/10.6/10.7/10.8 |
| Interface | Standard | Ethernet 100BASE-TX/10BASE-T, USB2.0 |
| | Optional | Ethernet 1000BASE-T, Bidirectional Parallel (IEEE1284-B) |

*1: See our official website for the latest supported OS.

Scan Function

| Item | DocuCentre-V C7775 | DocuCentre-V C6675 | DocuCentre-V C5575 | DocuCentre-V C4475 | DocuCentre-V C3375 | DocuCentre-V C3373 | DocuCentre-V C2275 |
|---------------------------|------------------------------------------------------------|------------------------------|--------------------|--------------------|--------------------|--------------------------------------------------------------------------------------------------|--------------------|
| Type | Colour Scanner | | | | | | |
| Scanning Resolution | 600 x 600 dpi, 400 x 400 dpi, 300 x 300 dpi, 200 x 200 dpi | | | | | | |
| Original Scanning Speed*1 | Duplex Automatic Document Feeder B1-C | | | | | B/W: 70 ppm, Colour: 70 ppm | |
| | Duplex Automatic Document Feeder B1-PC | | | | | B/W: 80 ppm Colour: 80 ppm 1 pass, 2 sided scanning B/W: 150 ppm*2 Colour: 150 ppm*2 | |
| Interface | Standard | Ethernet 100BASE-TX/10BASE-T | | | | | |
| | Optional | Ethernet 1000BASE-T | | | | | |

*1: The scanning speed varies depending on the documents. *2: 160 ppm for both B/W and colour when Quiet Mode is disabled. For DocuCentre-V C6675/C5575/C4475/C3375/C3373/C2275, Quiet Mode is enabled by factory default. This setting can be changed to suit the customer's usage.

Fax Function (Optional)

| Item | Description |
|----------------------|---------------------------------------------------------------------------------------|
| Document Size | Max: A3, 11 x 17", Long document (Longest 600 mm) |
| Recording Paper Size | Max: A3, 11 x 17" Min: A5 |
| Transmission Time | 2 seconds and more but fewer than 3 seconds |
| Transmission Mode | ITU-T G3 |
| Applicable Lines | Telephone subscriber line, PBX, fax communication (PSTN), maximum 3 ports (G3-3 port) |

HCF B1 (Optional)

| Item | Description |
|-------------------------------------|------------------------------------------|
| Paper Size / Paper Weight | A4 LEF, Letter LEF, B5 LEF, 55 - 216 gsm |
| Feeding Capacity*1 / Number of Tray | 2,030 sheets x 1-tray |
| Dimensions / Weight | W 389 x D 610 x H 380mm, 29 kg |

*1: 80gsm paper.

Customer Expectation Document (CED)

For detailed product specifications, optimum performance parameters and service clearances refer to the Customer Expectation Document.

Standard Duplex Automatic Document Feeder B1-C

| Item | DocuCentre-V C3375 | DocuCentre-V C3373 | DocuCentre-V C2275 |
|--------------------------------|------------------------------------------------------------------------|-------------------------------|-------------------------------|
| Original Size / Paper Weight | Max: A3, 11 x 17"; Min: A5*1 38 - 128 gsm (In Duplex: 50 - 128 gsm) | | |
| Capacity*2 | 110 sheets | | |
| Feeding Speed (A4 LEF Simplex) | B/W: 35 ppm Colour: 35 ppm | B/W: 30 ppm Colour: 30 ppm | B/W: 25 ppm Colour: 25 ppm |
| Dimensions / Weight | W 560 x D 498 x H 125 mm, 8 kg | | |

*1: Nonstandard size single-sided mode: 125 x 85mm. *2: 64 gsm paper.

Single-Pass Duplex Automatic Document Feeder B1-PC (Optional)

| Item | DocuCentre-V C7775 | DocuCentre-V C6675 | DocuCentre-V C5575 | DocuCentre-V C4475 | DocuCentre-V C3375 | DocuCentre-V C3373 | DocuCentre-V C2275 |
|--------------------------------|------------------------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|-------------------------------|
| Original Size / Paper Weight | Max: A3, 11 x 17"; Min: A5*1 38 - 128 gsm (In Duplex: 50 - 128 gsm) | | | | | | |
| Capacity*2 | 130 sheets | | | | | | |
| Feeding Speed (A4 LEF Simplex) | B/W: 70 ppm Colour: 70 ppm | B/W: 65 ppm Colour: 65 ppm | B/W: 55 ppm Colour: 50 ppm | B/W: 45 ppm Colour: 45 ppm | B/W: 35 ppm Colour: 35 ppm | B/W: 30 ppm Colour: 30 ppm | B/W: 25 ppm Colour: 25 ppm |
| Dimensions / Weight | W 560 x D 498 x H 140mm, 11 kg | | | | | | |

*1: Nonstandard size single-sided mode: 125 x 85mm. *2: 64 gsm paper.

Finisher-A1 (Optional)

| Item | Description |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type | Sort (Offset available) / Stack (Offset available) |
| Paper Size | Max: A3, 11 x 17"; Min: Postcard |
| Paper Weight | 52 - 220 gsm |
| Paper Capacity | Finishing Tray [Without Stapling] A4: 500 sheets; B4: 250 sheets; A3 or larger: 200 sheets; Mixed Size Stacking: 250 sheets [With Stapling] 30 copies |
| Staple | Capacity A4: 50 sheets (90 gsm or less), B4 or larger: 30 sheets (90 gsm or less) Paper Size Max: A3, 11 x 17"; Min: B5 LEF Position Single stapling (Front/Angled) |
| Dimensions / Weight | W 559 x D 448 x H 246mm, 12 kg |

Note: The unit cannot be installed on DocuCentre-V C7775/C6675/C5575/C4475.

Finisher-B1 (Optional)

| Item | Description |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type | Sort (Offset available) / Stack (Offset available) |
| Paper Size*1 | Max: A3, 11 x 17"; Min: B5 LEF |
| Paper Weight | 52 - 220 gsm |
| Paper Capacity | [Without Stapling] A4: 2,000 sheets; B4 or larger: 1,000 sheets; Mixed Size Stacking: 300 sheets [With Stapling] A4: 100 copies or 1,000 sheets, B4 or larger: 75 copies or 750 sheets [With Booklet Finishing]*2 50 copies or 600 sheets [With Scoring] 500 sheets |
| Staple | Capacity 50 sheets (90 gsm or less) Paper Size Max: A3, 11 x 17"; Min: B5 LEF Position Single stapling (Front/Angled, Back/Straight) or dual stapling (Parallel) |
| Punch*3 | Number of Holes 2-hole/4-hole punch or 2-hole/3-hole punch (US Specifications) Paper Size A3, 11 x 17", B4, A4, A4 LEF, Letter, Letter LEF, B5 LEF Paper Weight 55 - 200 gsm |
| Booklet Finishing*2 | Capacity Saddle Staple: 15 sheets; Scoring: 5 sheets Paper Size Max: A3, 11 x 17"; Min: A4, Letter Paper Weight Saddle Staple: 64 - 80 gsm, Scoring: 64 - 105 gsm |
| Dimensions / Weight | W 620 x D 552 x H 987mm, 28 kg With Booklet Finisher: W 620 x D 597 x H 1,057 mm, 37 kg |

*1: Paper in the sizes larger than A3 or 11 x 17" or smaller than B5 are delivered to the Center Tray. *2: The Booklet Finishing function requires the Booklet Maker Unit for Finisher-B1. *3: The Punch function requires the 2/4 Hole Punch Kit for Finisher-B1 or US 2/3 Hole Punch Kit for Finisher-B1. Note: The unit cannot be installed on DocuCentre-V C7775/C6675.

Descriptions in this material, product specifications and / or appearances are subject to change without prior notice due to improvements. Please note that the product colour appears differently from the actual colour as a result of properties of papers or printing ink. Windows is registered trademarks of Microsoft Corporation. Other company names or product names are registered trademarks or trademarks of each company.

<Reproduction Prohibitions> Please note that reproduction of the following is prohibited by law:

Domestic and overseas bank notes and coins, government-issued securities, national bonds and local bond certificates. Unused postage stamps and post cards. Certificate stamps established by law. The reproduction of copyrighted works (literary works, musical works, paintings, engravings, maps, cinematographic works, photographic works, etc.) is prohibited except when they are reproduced personally, at home or within limited range.

C3 Finisher with Booklet Maker (Optional)

| Item | Description |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type | Output Tray Sort/Stack Finishing Tray Sort (Offset available) / Stack (Offset available) Booklet Tray Sort/Stack |
| Paper Size*1 | Output Tray Max: 12 x 19" (304.8 x 482.6 mm); Min: Postcard Finishing Tray Max: 12 x 19" (304.8 x 482.6 mm); Min: B5 Booklet Tray Max: 12 x 18" (304.8 x 457.2mm); Min: B5 |
| Paper Weight | Output Tray 52 - 300 gsm Finishing Tray 52 - 300 gsm Booklet Tray 60 - 105 gsm*3 |
| Paper Capacity | Output Tray 500 sheets (A4) Finishing Tray [Without Stapling] A4: 1,500 sheets; B4 or larger: 1,500 sheets; Mixed Size Stacking 300 sheets [With Stapling] A4: 200 copies or 1,500 sheets; B4 or larger: 100 copies or 1,500 sheets; Mixed Size Stacking: 70 copies or 200 sheets Booklet Tray 20 copies |
| Staple | Capacity 50 sheets (90 gsm or less)*2 Paper Size Max: A3, 11 x 17"; Min: B5 Position Single stapling (front/back, angled), dual stapling (parallel) |
| Punch | Number of Holes 2-hole/4-hole punch or 2-hole/3-hole punch Paper Size A3, 11 x 17", B4, A4, A4 LEF, Letter, Letter LEF (8.5 x 11"), B5 LEF, 7.25 x 10.5", 8 x 10", 16K, Cover A4, 9 x 11", 215 x 315 mm, 8.5 x 13", Legal (8.5 x 14"), 11 x 15", 8K Paper Weight 52 - 200 gsm |
| Booklet Finishing | Capacity Saddle Staple: 16 sheets; Fold: 5 sheets; Single Fold: 1 sheet Paper Size Max: SRA3 (320 x 450 mm), 12 x 18" (304.8 x 457.2 mm); Min: B5 Paper Weight Saddle Staple: 60 - 105*4,5 gsm; Middle-Fold: 60 - 105*4,5 gsm; Single Fold: 60 - 105 gsm |
| Dimensions / Weight | W 790 x D 589 x H 1,056 mm, 61 kg W 1,025 x D 726 x H 1,056 mm, 115 kg (when Folder Unit CD1 and Punch Unit are installed) |

*1: Paper less than B5 size is delivered from the Center Tray. *2: Up to 65 sheets can be stapled when the C3 Finisher Staple Unit 65 Sheets is installed. *3: Cover sheets can be up to 256 gsm. *4: Covers can be up to 256 gsm (Thick Paper 2) for saddle staple during printing. *5: Printed covers can be up to 169 gsm (Thick Paper 1) for middle-fold or saddle staple during copying, while blank covers can be up to 256 gsm (Thick Paper 2).

Folder Unit CD1 (Optional)

| Item | Description |
|-----------------------------------|-----------------------------------------------------------|
| Paper Size | Z Fold Half Sheet A3, 11 x 17", B4 Tri-fold A4, Letter |
| Paper Weight | Z Fold Half Sheet 60-90 gsm Tri-fold 60-90 gsm |
| Power / Maximum power consumption | AC100V +/- 10%, 1.0A, 50/60Hz common, 100W or less |
| Dimensions / Weight | W 232 x D 726 x H 991mm, 52.1 kg or less |

Note: Power supply separate from the main unit is required.

Side Tray

| Item | Description |
|---------------------------|--------------------------------------------------|
| Paper Size / Paper Weight | Same as the Basic Specifications / Copy Function |
| Paper Capacity*1 | 100 sheets |
| Dimensions / Weight | W 353 x D 469 x H 198mm, 1 kg |

*1: 64 gsm paper.



<For Your Safe Use>

- Before using the product, read the Instruction Manual carefully for proper use.
- Use the product with an appropriate and adequate power source and voltage displayed.
- Be sure to ground the machine. In the case of a failure or short circuit, an electric shock may result.



For more information or detailed product specification, please call or visit us at

Fuji Xerox Australia

101 Waterloo Road, Macquarie Park NSW 2113

Tel. (02) 9856 5000 Fax. (02) 9856 5003

<http://www.fujixerox.com.au>